

CDM4161 - Pre-calibrated module for carbon dioxide


Features:

- * High selectivity to CO₂
- * Maintenance free
- * Low power consumption
- * Long life
- * Compact size
- * Pre-calibrated
- * Low cost

CDM4161 is a new unit which uses TGS4161, Figaro's low-power consumption solid electrolyte CO₂ sensor. Due to Figaro's proprietary idea for signal processing with a microcomputer, no maintenance is required for this module. By application of DC voltage to the module, an analog output voltage proportional to CO₂ concentration can be obtained. The module can generate a control signal based on a user-selectable threshold concentration. When compared with traditional CO₂ sensor modules using IR sensors, Figaro's CO₂ module is much more cost effective, making this module the ideal choice for indoor air quality control systems.

Applications:

- * Indoor air quality control
- * CO₂ monitors

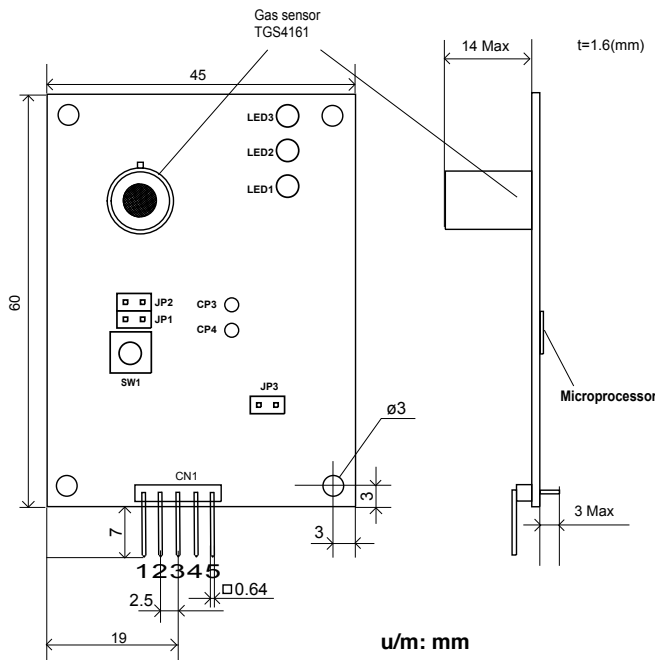

CDM4161 dimensions

Pin No.	Name	Description
1	VIN	Power supply input
2	VCONC	CO ₂ concentration output
3	CTRL	Control signal output
4	TRBL	Trouble signal output
5	GND	Common ground

CDM4161 pin designations of CN1

NOTE: CN1 should be MB5P-90S, mfg. by JST.
Recommended receptacle for connector: 05JQ-BT, mfg. by JST.

ApolloSense Ltd

Shenzhen:

Address : Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031, China

Tel : (86-755) 83680810 83680820 83680830 83680860

Fax : (86-755) 83680866

Hong Kong:

Address : Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel : (852) 2737 0903

Fax : (852) 2737 0938

Email : sales@apolllounion.com

Specifications:

Product name	Carbon dioxide (CO ₂) sensor module	
Model No.	CDM4161-L00	CDM4161-M00
Detection range	400 to 4,500ppm	400 to 9,000ppm
Sensor (principle)	TGS4161 (solid state electrolyte)	
Accuracy (*1)	approx. ±20%	
Power supply	DC5.0±0.2V regulated	
Power consumption	300mW (typical)	
Inrush current	100mA (max)	
Operational temperature & humidity range	-10°~+50°C, 5~95%RH (avoid condensation)	
Storage temperature & humidity range	-20°~+60°C, 5~90%RH (pack in a moisture proof bag)	
Warm up time	2 hours	
CO ₂ concentration signal (*2)	Continuous analog output proportional to CO ₂ concentration	
	$V_{conc} = \text{CO}_2 \text{ concentration} / 1,000$ (DC 4.5V full scale)	$V_{conc} = \text{CO}_2 \text{ concentration} / 2,000$ (DC 4.5V full scale)
Control signal	ON: HIGH output (when CO ₂ conc. exceeds threshold) OFF: LOW output	
	800/ 1,000/ 1,500/ 2,000 (ppm)	1,000/ 2,000/ 5,000/ 8,000 (ppm)
Trouble signal	ON: LOW output (sensor trouble) OFF: FLOAT NC	
LED display	Green LED: Lights while power is on (blinks during warm up)	
	Yellow LED: Blinks during trouble	
	Red LED: Lights when CO ₂ concentration exceeds the threshold	
Reset switch	Establishes the ambient CO ₂ concentration as 400ppm when pushed	
Dimensions	45 x 60 x 17mm (45 x 67 x 17mm incl. CN1)	
Weight	approx. 14g	

Note 1: Assumes benchmark is set accurately at 400ppm of CO₂. This value does not contain long term drift.

Note 2: In this module, the CO₂ concentration is calculated by measuring the relative change of sensor output at the measuring point from sensor output in clean air (assumed to be 400ppm of CO₂).

IMPORTANT: This product is not designed and authorized for use as a critical component in life support applications wherein a failure or malfunction of the products may result in injury or threat to life. Figaro Engineering Inc. reserves the right to make changes without notice to this product to improve reliability, functioning or design.

ApolloSense Ltd

Shenzhen:

Address : Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031, China

Tel : (86-755) 83680810 83680820 83680830 83680860

Fax : (86-755) 83680866

Hong Kong:

Address : Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel : (852) 2737 0903

Fax : (852) 2737 0938

Email : sales@apolounion.com